
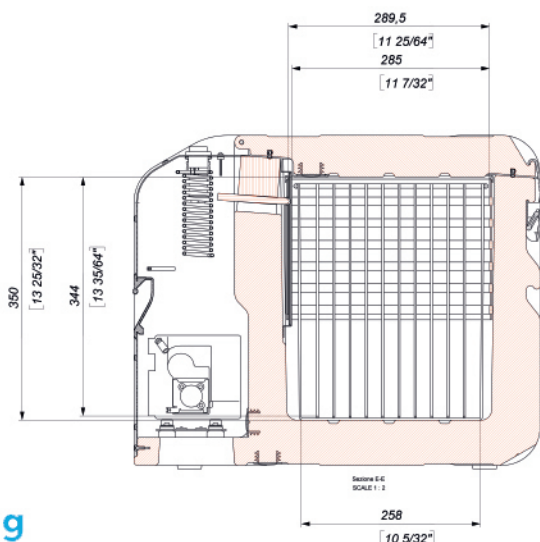
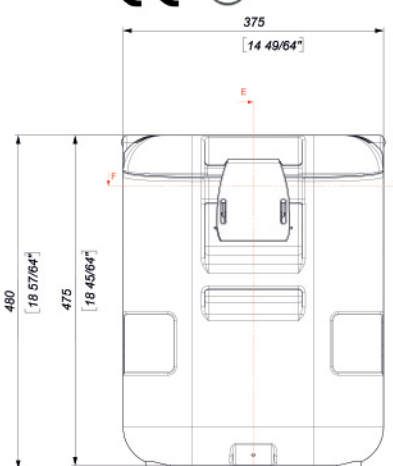


T0022
PRODUCT INFO

Model name	T0022/FDN	T0022/FDH
EE article nr.	8160001/00	816001/01
Gross capacity (lt)	22	22
Temperature range (°C)	> -24°C	+40°C to -24°C
Automatic cooling/heating	no	yes
Voltage	12-24Vdc	12-24Vdc
Peak Amps (@12Vdc)	9	9
Fuse on DC cord	16A	16A
External dimensions (mm)	585 x 375 x 480	585 x 375 x 480
Weight (kg)	20,5	21
PU insulation (mm)	65-70	65-70
"K" insulation factor	n/a	n/a
Compressor (model)	BD50F	BD50F
Refrigerant gas (type)	R134a	R134a
Refrigerant gas (gr)	51	51
Cut-out / cut-in voltage	9,6Vdc-10,9Vdc	9,6Vdc-10,9Vdc
AC/DC power supply (opt)	560019/00	560019/00
AC/DC power supply input	100-240Vac 50/60 Hz	100-240Vac 50/60 Hz

*with ambient temperature +30°C

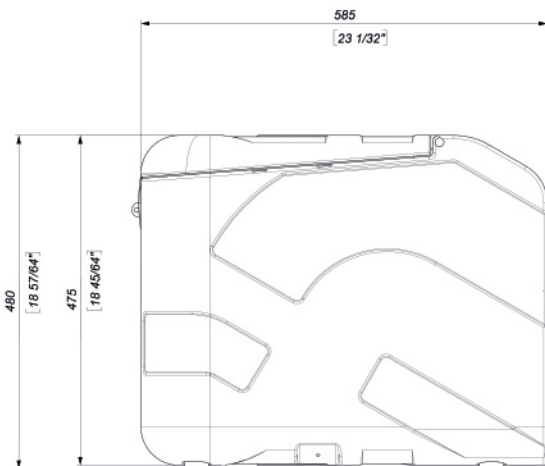

easy cooling, smart moving

www.coldtainer.com

The COLDTAINER product line includes a large range of state of the art 12V active mobile refrigerated containers. The containers are produced using the rotational molding technology according to the highest standards. They come in a variety of types, internal volumes and internal temperature ranges designed to satisfy all possible demands of professional users in term of temperature controlled transport