
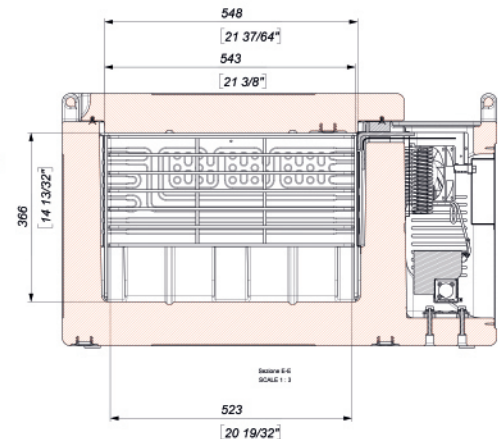
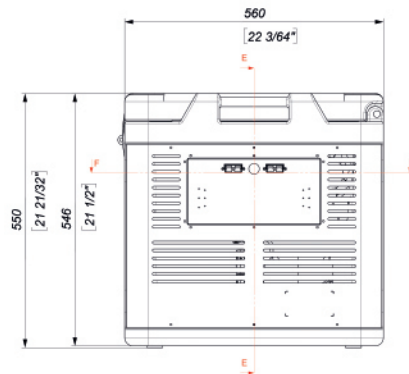


## T0082 PRODUCT INFO

Model name	T0082/FDN	T0082/FDH	T0082/XFDN
EE article nr.	816004/00	816004/01	816004/02
Gross capacity (lt)	82	82	82
Temperature range (°C)	> -24°C	+40°C to -24°C	> -35°C
Automatic cooling/heating	no	yes	no
Voltage	12-24Vdc	12-24Vdc	12Vdc
Peak Amps (@12Vdc)	9	9	25
Fuse on DC cord	25A	25A	30A
External dimensions (mm)	940 x 560 x 551	940 x 560 x 551	940 x 560 x 551
Weight (kg)	35	35	40
PU insulation (mm)	80	80	80
"K" insulation factor	0,32 W/m <sup>2</sup> K	0,32 W/m <sup>2</sup> K	0,32 W/m <sup>2</sup> K
Compressor (model)	BD50F	BD50F	BD220CL
Refrigerant gas (type)	R134a	R134a	R404A
Refrigerant gas (gr)	65	65	100
Cut-out / cut-in voltage	9,6Vdc-10,9Vdc	9,6Vdc-10,9Vdc	11Vdc-12,3Vdc
AC/DC power supply (opt)	560019/00	560019/00	560020/00
AC/DC power supply input	100-240Vac 50-60 Hz	100-240Vac 50-60 Hz	100-240Vac 50-60 Hz

\*with ambient temperature +30°C

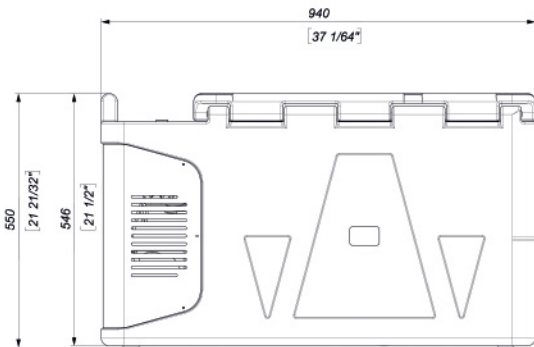

**easy cooling, smart moving**

[www.coldtainer.com](http://www.coldtainer.com)

The COLDTAINER product line includes a large range of state of the art 12V active mobile refrigerated containers. The containers are produced using the rotational molding technology according to the highest standards. They come in a variety of types, internal volumes and internal temperature ranges designed to satisfy all possible demands of professional users in term of temperature controlled transport